




S A N D S T O N E

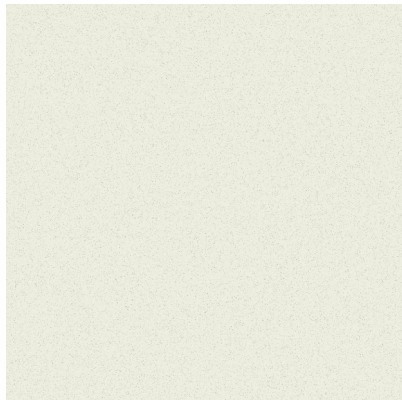


SANDSTONE WHITE - 6001

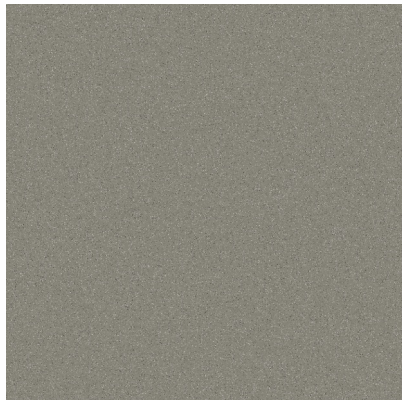

SANDSTONE GREEN - 6002

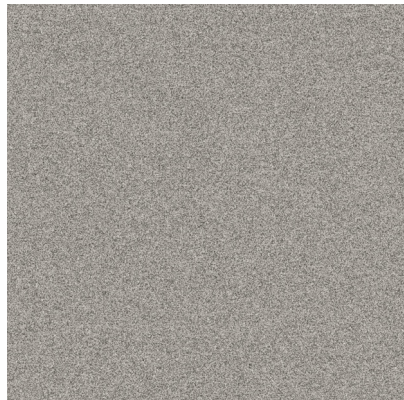

SANDSTONE GREY - 6003

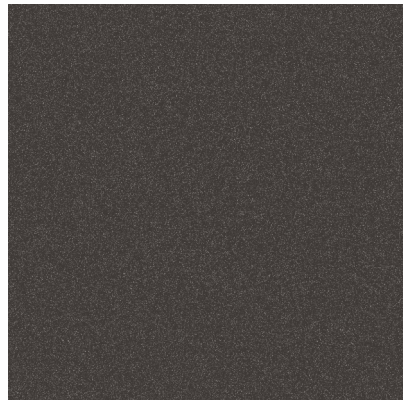

SANDSTONE BLACK - 6004



SANDSTONE CREMA - 6005



SANDSTONE BROWN - 6006




SANDSTONE SAHARA - 6007



solids

S O L I D C O L O R



SOLID WHITE 6041



SOLID BLACK 6042



SOLID GREY 6043




SOLID BEIGE 6044



SOLID COTTO 6045



SOLID MASHROOM 6046



SOLID COPPER 6047



PACKAGING DETAILS

STANDARDS UNI EN 14411 - ISO 13006 Annex G group bla

PRODUCTS	SIZE IN CM	THICKNESS	PCS. / BOX	WEIGHT / BOX	SQ. MTR. / BOX
FULL BODY / OUTDOOR VITRIFIED TILES	60x60cm	10mm	4	————	1.44 sq. mtr.

TECHNICAL FEATURES

STANDARDS UNI EN 14411 - ISO 13006 Annex G group bla

NORMS	EN 14411 - ISO 13006 REQUIRED STANDARD		OUR VALUE
UNI EN ISO 10545/2	Length and width	± 0.6 % max	ACCORDING
	Linearity	± 0.5 % max	
	Thickness	± 5 % max	
UNI EN ISO 10545/3	≤ 0.5%		ACCORDING
UNI EN ISO 10545/4	S ≥ 1300 N (Thickness >7.5 mm) R ≥ 35 N/mm2		S 2831N R 35.3 N/mm2
UNI EN ISO 10545/7	Glazed tiles - Abrasion class from 1 to 5		Class 5
UNI EN ISO 10545/9	No sample must show visible defects		RESISTANT
UNI EN ISO 10545/12	RESISTANT		RESISTANT
UNI EN ISO 10545/13	Test method available		ACCORDING
UNI EN ISO 10545/14	Minimum Class 3		Class 5
DIN 51130	R		R11
UNI EN 101	≥ 5° Mohs		8

Note: Color Shown are as accurate as the limitations of the printing process will allow. Prospective customer are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notices. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instruction on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.